Full-Size Thin Twin® Laundry System

WET3300S (27" Electric)
WGT3300S (27" Gas)

KEY FEATURES

Washer

- 2.6 cu. ft. Capacity
- 8 Automatic Cycles
- 2-Piece Surgilator® Agitator

Dryer

- 5.9 cu. ft. Capacity
- 6 Automatic Cycles
- Automatic Dry-Miser™ Control

COLORS

White(Q)

Thin Twin® Features & Specifications

Washer

Model No.	27" WET3300S 27" WGT3300S
Wash System	
Capacity (cu. ft.)	2.6
Motor Speed	2
Gentle Wash System	Yes
Agitator	Double Duty
Lint Filter	Yes
Washer Controls	
Automatic Cycles	8
Super Wash	Yes
Regular/Heavy	Yes
Permanent Press	Yes
Delicate	Yes
Soak	Yes
Prewash	Yes
Wash/Rinse Temperatures	4
Water Levels	4
Convenience	
Fabric Softener Dispenser	Pt. #3350834
Wash Basket	White Porcelain
ToughTop II™ Top & Lid	Yes
General Information	
Direct Drive Motor (hp)	½
Transition Panel	Yes
Self-Leveling Rear Legs	Yes
Tripod 3-Point Suspension	Yes
Polypropylene Tub	Yes
Corrugated Drain Hose	Yes
Rip Cord Suspension	Yes
Front Serviceability	Yes

Dryers

Model No.	27" WET3300S	27" WGT3300S
Drying System		
Drum Volume (cu. ft.)	5.9	5.9
Dry-Miser™ Control	Automatic	Automatic
Gentle Heat System	Yes	Yes
Lint Screen	Front Mounted	Front Mounted
Dryer Controls		
Temperature Settings	3	3
Automatic Cycles	6	6
Auto Perm. Press/Heavy (high heat)	Yes	Yes
Auto Delicate (low heat)	Yes	Yes
Timed Drying	Yes	Yes
Tumble Press®	Yes	Yes
Damp Dry	Yes	Yes
Fluff Air	Yes	Yes
Push-to-Start Button	Yes	Yes
End-of-Cycle Signal	Yes	Yes
General Information		
4-Way Venting	Yes	Yes
Electrical Requirements	240V/208V	120V
Electric Heating Element (watts)	4600/3460	—
Gas Burner (BTU)	—	16,000
180° Side-Swing Door	Yes	Yes
Baked Acrylic Enamel Cabinet Finish	Yes	Yes
DuraWhite™ Drum Finish	Yes	Yes
Variator Baffles	Yes	Yes
Approx. Shipping Weight (lbs.)	310	340

Accessories

Dryer Venting	
All dryer vent kits available in Accessories Section.	
Cords	
4396654RB	6' 4-Wire (Cord) Electric Dryer Hook Up Kit With 8' Metal Vent & 2 Clamps
8171378RC	6' 30 Amp 3-Wire Power Dryer Cord - Retail Pkg
8171381RC	6' 30 Amp 4-Wire Power Dryer Cord - Retail Pkg
PT220L	4' Dryer Cord, 3-Wire, 30 Amp
PT400L	4' Dryer Cord, 4-Wire, 30 Amp
PT600L	6' Dryer Cord, 4-Wire, 30 Amp
W10182829RB	4' 3-Wire (Cord) Electric Dryer Hook Up Kit With 8' Metal Vent With Slit-Cuff Ends & 2 Clamps
W10182830RB	4' 4-Wire (Cord) Electric Dryer Hook Up Kit With 8' Metal Vent With Slit-Cuff Ends & 2 Clamps
Gas Connections	
20-48KITRC	4' Gas Line Dryer Connector Install Kit
3392235	LP Gas Conversion Kit
49573	LP Gas Conversion Kit
Miscellaneous	
3350834	Optional Fabric Softener Dispenser

Product Dimensions

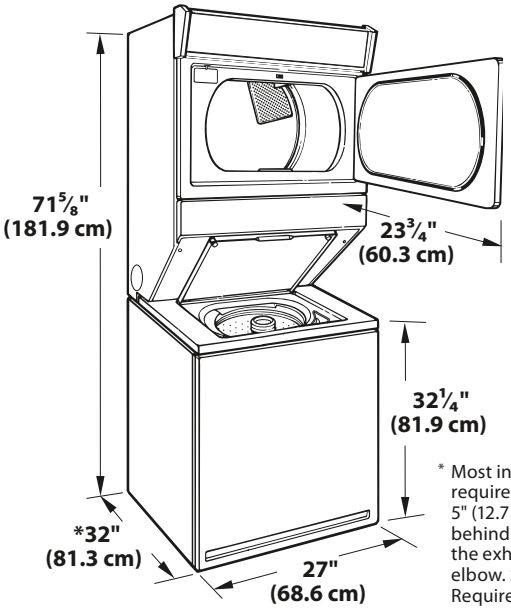

* Most installations require a minimum 5" (12.7 cm) clearance behind the dryer for the exhaust vent with elbow. See "Venting Requirements."

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.

FRONT LOADING WASHER FEATURES & SPECIFICATIONS

	Duet®			
Model No. (27")	**WFW9750W Up to 1400 RPM**	**WFW9700V Up to 1000 RPM**	**WFW9550W Up to 1300 RPM**	**WFW9500T Up to 1000 RPM**
Wash System				
Capacity	4.5 cu. ft. IEC†	4.4 cu. ft. IEC†	4.4 cu. ft. IEC†	4.1 cu. ft. IEC†
Wash/Spin Speed Combinations	Multiple	Multiple	Multiple	Multiple
Built-In Heater	Yes	Yes	Yes	Yes
Steam Technology	Yes	Yes	Yes	Yes
Motor	Variable	Variable	Variable	Variable
Deep Clean Wash	Yes – Steam, Direct Inject	Yes – Steam, Direct Inject	Yes – Steam, Direct Inject	Yes – Steam, Direct Inject
ENERGY STAR® Qualified	Yes	Yes	Yes	Yes
Care Control Temperature Management	Yes	Yes	Yes	Yes
Quiet Wash System	Plus	Plus	Plus	Plus
NightQuiet™	Yes	—	Yes	—
Washer Controls				
Cycles	14	14	12	10
Active Wear	Yes	Yes	Yes	—
Bulky Items	Yes/Steam	Yes/Steam	Yes/Steam	Yes/Steam
Wool	Yes	Yes	—	—
Silk	Yes	Yes	—	—
Normal/Casual	Yes/Steam	Yes/Steam	Yes/Steam	Yes/Steam
Heavy Duty	Yes/Steam	Yes/Steam	Yes/Steam	Yes/Steam
Whitest Whites	Yes/Steam	Yes/Steam	Yes/Steam	Yes/Steam
Sanitary NSF Certified	Water Temp Option	Water Temp Option	Water Temp Option	Water Temp. Option
Clean Washer with Affresh™	Yes/Steam	Yes/Steam	Yes/Steam	Yes/Steam
Delicate	Yes	Yes	Yes	Yes
Hand Washables Regular/Light	Yes	Yes	Yes	Yes
Soak	Yes	Yes	Yes	Yes
Delay Wash	Up to 18 Hours	Up to 18 Hours	Up to 12 Hours	Up to 12 Hours
Quick Wash	Yes	Yes	Yes	—
Drain & Spin	Yes	Yes	Yes	Yes
Rinse & Spin	Yes	Yes	Yes	Yes
Extra-Rinse	Yes	Yes	Off/On/Max.	Yes
Max Rinse	Yes	—	—	—
FanFresh™	Yes	—	—	—
TumbleFresh™ Option	—	—	Yes	—
End-of-Cycle Signal	Adjustable	Adjustable	Adjustable	Adjustable
Wash/Rinse Temperatures	5	5	4	4
Water Levels	Automatic	Automatic	Automatic	Automatic
Convenience				
Bleach Dispenser	Yes — Flushed	Yes — Flushed	Yes — Flushed	Yes — Flushed
Fabric Softener Dispenser	Yes — Flushed	Yes — Flushed	Yes — Flushed	Yes — Flushed
Detergent Dispenser	Yes — Flushed	Yes — Flushed	Yes — Flushed	Yes — Flushed
OXI Dispenser	Yes	Yes	—	—
Prewash	—	—	—	—
SpillGuard™ Top	Yes	Yes	Yes	Yes
General Information				
Wash Basket	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Approx. Shipping Weight (lbs.)	245	245	245	245
Color Availability*	W, R, L	W	W, R, L	W

* Q – White, W – White with Silver Metallic or White with Dove Grey Accents, E – Ocean Sapphire, B – Black, R – Cranberry, and L – Lunar Silver
† Washes equivalent sized loads as a 3.8 agitator-based machine, per IEC ratios.
®ENERGY STAR is a U.S. Registered Mark.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

FRONT LOADING WASHER FEATURES & SPECIFICATIONS

	Duet®			Duet® 4.0	
Model No. (27")	**WFW9450W Up to 1300 RPM**	**WFW9400S Up to 1200 RPM**	**WFW9400V Up to 1200 RPM**	**WFW9250W Up to 1200 RPM**	**WFW9150W Up to 1200 RPM**
Wash System					
Capacity	4.4 cu. ft. IEC†	4.1 cu. ft. IEC†	4.1 cu. ft. IEC†	4.0 cu. ft. IEC†	4.0 cu. ft. IEC†
Wash/Spin Speed Combinations	Multiple	Multiple	Multiple	Multiple	Multiple
Built-In Heater	Yes	Yes	Yes	Yes	—
Steam Technology	—	—	—	—	—
Motor	Variable	Variable	Variable	Variable	Variable
Deep Clean Wash	Yes — Direct Inject	Yes – Direct Inject	Yes – Direct Inject	Yes	Yes
ENERGY STAR® Qualified	Yes	Yes	Yes	Yes/CEE™ Tier III	Yes/CEE™ Tier III
Care Control Temperature Management	Yes	Yes	Yes	Yes	Yes
Quiet Wash System	Yes	Plus	Plus	Yes	Yes
NightQuiet™	—	—	—	—	—
Washer Controls					
Cycles	12	14	14	12	10
Active Wear	—	—	—	—	—
Bulky Items	Yes	Yes	Yes	Yes	Yes
Wool	—	Yes	Yes	—	—
Silk	—	Yes	Yes	Yes	Yes
Normal/Casual	Yes	Yes	Yes	Yes	Yes
Heavy Duty	Yes	Yes	Yes	Yes/ECO	Yes/ECO
Whitest Whites	Yes	Yes	Yes	Yes/ECO	Yes
Sanitary NSF Certified	Water Temp Option	Yes	Yes	Yes	—
Clean Washer with Affresh™	Yes	Yes	Yes	Yes	Yes
Delicate	Yes	Yes	Yes	Yes	Yes
Hand Washables Regular/Light	Yes	Yes	Yes	—	—
Soak	Yes	Yes	Yes	Yes	Yes
Delay Wash	Up to 12 Hours	Up to 16 Hours	Up to 16 Hours	Up to 10 Hours	Up to 10 Hours
Quick Wash	Yes	Yes	Yes	Yes	Yes
Drain & Spin	Yes	Yes	Yes	Yes	Yes
Rinse & Spin	Yes	Yes	Yes	Yes	Yes
Extra-Rinse	Off/On/Max.	Yes	Yes	Yes	Yes
Max Rinse	—	—	—	—	—
FanFresh™	—	—	—	—	—
TumbleFresh™ Option	Yes	—	—	Yes	Yes
End-of-Cycle Signal	Adjustable	Adjustable	Adjustable	On/Off	On/Off
Wash/Rinse Temperatures	4	5	5	4	3
Water Levels	Automatic	Automatic	Automatic	Automatic	Automatic
Convenience					
Bleach Dispenser	Yes — Flushed	Yes — Flushed	Yes — Flushed	Yes — Flushed	Yes — Flushed
Fabric Softener Dispenser	Yes — Flushed	Yes — Flushed	Yes — Flushed	Yes — Flushed	Yes — Flushed
Detergent Dispenser	Yes — Flushed	Yes — Flushed	Yes — Flushed	Yes — Flushed	Yes — Flushed
OXI Dispenser	—	—	—	—	—
Prewash	—	Yes	Yes	—	—
SpillGuard™ Top	Yes	Yes	Yes	Yes	Yes
General Information					
Wash Basket	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Approx. Shipping Weight (lbs.)	245	245	245	238	238
Color Availability*	W, R, L	W	E	W, R, L	W

* Q – White, W – White with Silver Metallic or White with Dove Grey Accents, E – Ocean Sapphire, B – Black, R – Cranberry, and L – Lunar Silver
† Washes equivalent sized loads as a 3.8 agitator-based machine, per IEC ratios.
®ENERGY STAR is a U.S. Registered Mark.

TOP LOADING WASHER FEATURES & SPECIFICATIONS

	Cabrio®				Super Capacity Plus	
Model No. (27")	**WTW6800W Up to 1100 RPM**	**WTW6500W Up to 1100 RPM**	**WTW6300W Up to 950 RPM**	**WTW6200V Up to 950 RPM**	**WTW58ESV**	**WTW5790V**
Wash System						
Capacity	5.0 cu. ft. IEC†	5.0 cu. ft. IEC†	4.7 cu. ft. IEC†	4.5 cu. ft. IEC†	4.0 cu. ft. (I.E.C.)	3.5 cu. ft.
Wash/Spin Speed Combinations	—	—	—	—	5	5
Motor	Variable	Variable	Variable	Variable	—	—
Deep Clean Wash	Yes – Direct Inject	Yes – Direct Inject	Yes – Direct Inject	Yes – Direct Inject	—	—
ENERGY STAR® Qualified	Yes/CEE™ Tier III	Yes/CEE™ Tier III	Yes/CEE™ Tier III	Yes/CEE™ Tier I	Yes	—
Care Control Temperature Management	Yes	Yes	Yes	Yes	—	
Quiet Wash System	Ultra Plus	Plus	Yes	Yes	Plus	Plus
Wash Plate	Yes	Yes	Yes	—	—	—
Xtra Roll Action™ Plus Agitator	—	—	—	Yes—Flex Vane	Yes	Yes
2-Piece Surgilator® Agitator	—	—	—	—	—	—
Straight-Vane Agitator	—	—	—	—	—	—
Automatic Lint Filtration	Yes	Yes	Yes	Yes	Yes	Yes
Washer Controls						
Cycles	14	13	9	9	40	18
Heavy Duty	Yes	Yes	Yes	Yes	Yes	Yes
Super Wash	—	—	—	—	—	Yes
Bulky Items	Yes	Yes	Yes	—	Yes	—
Wool	Yes	Yes	—	—	—	—
Normal/Casual	Yes	Yes	Yes	Yes	Yes	Yes
Heavy	—	—	—	—	—	Yes
Whitest Whites	Yes	Yes	Yes	Yes	—	—
Clean Washer with Affresh™	Yes	Yes	Yes	—	—	—
Regular	—	—	—	—	Yes	Yes
Light	—	—	—	—	Yes	Yes
Casual/Permanent Press Cycles	Yes	Yes	—	Yes	Yes	Yes
Delicate	Yes	Yes	Yes	Yes	Yes	Yes
Regular/Light	—	—	—	—	Yes	Yes
Hand Washables	—	—	—	Yes	Yes	Yes
Prewash	—	—	—	—	—	—
Soak	Yes	Pre-Soak	—	Pre-Soak	Yes	—
Delay Wash	Up to 10 Hours	—	—	—	—	—
Quick Wash	Yes	Yes	—	—	Yes	—
Sheets	Yes	Yes	Yes	—	—	—
Colors/Towels	Yes	Yes	Yes	Yes	—	—
Drain & Spin	Yes	Yes	Yes	Yes	—	—
Rinse & Spin	Yes	Yes	—	Yes	—	—
Extra-Rinse	Yes	Yes	Yes	Yes	On/Off	On/Off
End-of-Cycle Signal	On/Off	Loud/Soft/On	On/Off	On/Off	—	On/Off
Wash/Rinse Temperatures	5	4	3	4	6	4
Water Levels	Automatic	Automatic	Automatic	4 Selectable & Automatic	Auto Load Sensing	4
Convenience						
Bleach Dispenser	Yes—Timed	Yes—Timed	Yes—Timed	Yes—Timed	Yes	Yes
Fabric Softener Dispenser	Yes—Timed	Yes—Timed	Yes—Timed	Yes—Timed	Yes	Yes
Detergent Dispenser	Yes—Timed	Yes—Timed	Yes—Timed	Yes—Timed	—	—
OXI Dispenser	Yes—Timed	—	—	—	—	—
SpillGuard™ Top	—	—	—	—	Yes	Yes
General Information						
Wash Basket	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	White Porcelain	White Porcelain
Approx. Shipping Weight (lbs.)	165	165	165	165	174	174
Color Availability*	W, B, L	W	W	W	W	Q

* Q – White, W – White with Silver Metallic or White with Dove Grey Accents, B – Black with Silver Metallic, H – Red with Silver Metallic and L – Lunar Silver

† Washes equivalent sized loads as a 4.6 ft³ agitator-based machine, per IEC ratios.

®ENERGY STAR is a U.S. Registered Mark.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

TOP LOADING WASHER FEATURES & SPECIFICATIONS

	Super Capacity Plus					
Model No. (27")	**WTW57ESV**	**WTW5590V**	**WTW5505V**	**WTW5300V**	**WTW5200V**	**WTW5100V**
Wash System						
Capacity	4.0 cu. ft. I.E.C.)	3.2 cu. ft.	2.5 cu. ft.	3.5 cu. ft.	3.5 cu. ft.	3.2 cu. ft.
Wash/Spin Speed Combinations	5	2	4	4	2	2
Motor	—	—	—	—	—	—
Deep Clean Wash	—	—	—	—	—	—
ENERGY STAR® Qualified	Yes	—	—	—	—	—
Care Control Temperature Management	—	—	—	—	—	—
Quiet Wash System	Yes	Yes	Yes	Yes	Yes	Yes
Wash Plate	—	—	—	—	—	—
Xtra Roll Action™ Plus Agitator	Yes	—	—	Yes	Yes	—
2-Piece Surgilator® Agitator	—	Yes	—	—	—	Yes
Straight-Vane Agitator	—	—	Yes	—	—	—
Automatic Lint Filtration	Yes	Yes	—	Yes	Yes	Yes
Washer Controls						
Cycles	32	10	6	16	14	10
Heavy Duty	Yes	—	—	—	—	—
Super Wash	Yes	Yes	—	—	—	—
Bulky Items	Yes	—	—	—	—	—
Wool	Yes	—	—	—	—	—
Normal/Casual	Yes	Yes	Yes	Yes	Yes	Yes
Heavy	—	Yes	Yes	Yes	Yes	Yes
Whitest Whites	—	—	—	—	—	—
Clean Washer with Affresh™	—	—	—	—	—	—
Regular	Yes	Yes	Yes	Yes	Yes	Yes
Light	Yes	Yes	Yes	Yes	Yes	—
Casual/Permanent Press Cycles	Yes	Yes	Yes	Yes	Yes	Yes
Delicate	Yes	Yes	Yes	Yes	Yes	Yes
Regular/Light	—	—	—	Yes	—	Yes
Hand Washables	Yes	—	—	Yes	—	—
Prewash	Yes	—	—	—	—	—
Soak	Yes	—	—	—	—	—
Delay Wash	—	—	—	—	—	—
Quick Wash	Yes	—	—	—	—	—
Sheets	—	—	—	—	—	—
Colors/Towels	—	—	—	—	—	—
Drain & Spin	—	—	—	—	—	—
Rinse & Spin	—	—	—	—	—	—
Extra-Rinse	On/Off	—	—	On/Off	On/Off	—
End-of-Cycle Signal	—	—	—	—	—	—
Wash/Rinse Temperatures	6	4	3	4	4	3
Water Levels	Auto Load Sensing	4	2	5	3	3
Convenience						
Bleach Dispenser	Yes	Yes	—	Yes	Yes	Yes
Fabric Softener Dispenser	Yes	—	—	Yes	Yes	—
Detergent Dispenser	—	—	—	Yes	—	—
OXI Dispenser	—	—	—	—	—	—
SpillGuard™ Top	Yes	Yes	Yes	Yes	Yes	Yes
General Information						
Wash Basket	White Porcelain	White Porcelain	Spreckle Porcelain	White Porcelain	White Porcelain	White Porcelain
Approx. Shipping Weight (lbs.)	174	174	168	174	174	174
Color Availability*	W, H	Q	Q	W	Q	Q

* Q – White, W – White with Silver Metallic or White with Dove Grey Accents, B – Black with Silver Metallic, H – Red with Silver Metallic and L – Lunar Silver

† Washes equivalent sized loads as a 4.6 ft^3 agitator-based machine, per IEC ratios.

®ENERGY STAR is a U.S. Registered Mark.

FRONT LOADING DRYER FEATURES & SPECIFICATIONS

	Duet®			
Electric Model No.	**WED9750W**	**WED9600T**	**WED9550W**	**WED9500T**
Gas Model No.	**WGD9750W**	**WGD9600T**	**WGD9550W**	**WGD9500T**
Drying System				
Capacity	7.5 cu. ft.	7.5 cu. ft.	7.2 cu. ft.	7.2 cu. ft.
Steam Technology	Yes	Yes	Yes	Yes
AccelerCare® Drying System	Yes	Yes	Yes	Yes
AccuDry™ Sensor	Yes	Yes	Yes	Yes
Quiet Dry	Plus	Plus	Plus	Plus
Extra-Large Lint Screen	Front-Mount	Front-Mount	Front-Mount	Front-Mount
Dryer Controls				
Temperature Settings	5	5	5	5
Resource Saver® Setting	—	—	—	—
High	Yes	Yes	Yes	Yes
Medium/Heavy High	—	—	—	—
Medium	Yes	Yes	Yes	Yes
Low	Yes	Yes	Yes	Yes
Extra Low	Yes	Yes	Yes	Yes
Air Only	Yes	Yes	Yes	Yes
Automatic Dry				
Cycles	13	12	12	10
Timed Dry	Yes	Yes	Yes	Yes
Damp Dry	Yes	Yes	—	Yes
Touch-Up	—	Yes	—	—
Bulky Items	Yes	Yes	Yes	Yes
NSF Certified Sanitization Cycle	Yes	Yes	Yes	—
Wrinkle & Odor Removal	Yes	—	—	—
Super Delicate	—	Yes	Yes	Yes
Quick Dry	Yes	Yes	Yes	Yes
Normal	—	Yes	Yes	Yes
Casual	—	Yes	Yes	Yes
Jeans	Yes	—	—	—
Tumble Press®	—	—	—	—
Wrinkle Shield™	Off/140	Off/140	Off/140	Off/140
Heavy Duty	Yes	Yes	Yes	Yes
Towels/Cottons	—	—	—	—
Delicates	Yes	Yes	Yes	Yes
Small Loads	—	—	—	—
Steam Cycles	Yes	Yes	Yes	Yes
Enhanced Touchup	Yes/Steam	Yes/Steam	Yes/Steam	Yes/Steam
Quick Refresh	Yes/Steam	Yes/Steam	Yes/Steam	Yes/Steam
ECO Normal	Yes	—	Yes	—
Convenience				
Large Side-Swing Door	Yes	Yes	Yes	Yes
End-of-Cycle Signal	Variable	Variable	Variable	Variable
DuraWhite™ Interior	Yes	Yes	Yes	Yes
Interior Light	Yes	Yes	Yes	Yes
Dry Rack Coupon	Yes	Yes	Yes	Yes
General Information				
Electric Heating Element (watts)†	5400	5400	5400	5400
Gas Heating Element (BTU)††	20,000	20,000	20,000	20,000
Venting	4-Way	4-Way	4-Way	4-Way
Cabinet Width (in.)	27	27	27	27
Approx. Shipping Weight (lbs.) Electric Gas	 149 149	 149 149	 149 149	 149 149
Color Availability*	W, R, L	W	W, R, L	W

* W – White with Silver Metallic or White with Dove Grey Accents, E – Ocean Sapphire, R – Cranberry, and L – Lunar Siver

† Electric requirements for electric dryer models 240V, 3-Wire, 60 Hz, AC, Standard 30-Amp Fuse Branch Circuit (subject to local codes).

†† Electric requirements for gas dryer models 120V, 3-Wire, 60 Hz, AC, Standard 15-Amp Fuse Branch Circuit (subject to local codes).

NOTE: Before purchasing this appliance, read important information about the estimated annual energy consumption or energy efficiency rating available from your dealer.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

FRONT LOADING DRYER FEATURES & SPECIFICATIONS

	Duet®			Duet® 4.0	
Electric Model No.	**WED9450W**	**WED9400S**	**WED9400V**	**WED9250W**	**WED9150W**
Gas Model No.	**WGD9450W**	**WGD9400S**	**WGD9400V**	**WGD9250W**	**WGD9150W**
Drying System					
Capacity	7.2 cu. ft.	7.2 cu. ft.	7.2 cu. ft.	6.7 cu. ft.	6.7 cu. ft.
Steam Technology	—	—	—	—	—
AccelerCare® Drying System	Yes	Yes	Yes	Yes	Yes
AccuDry™ Sensor	Yes	Yes	Yes	Yes	Yes
Quiet Dry	Plus	Plus	Plus	Yes	—
Extra-Large Lint Screen	Front-Mount	Front-Mount	Front-Mount	Front-Mount	Front-Mount
Dryer Controls					
Temperature Settings	4	5	5	5	4
Resource Saver® Setting		—	—	—	—
High	Yes	Yes	Yes	Yes	Yes
Medium/Heavy High	—	—	—	—	—
Medium	Yes	Yes	Yes	Yes	Yes
Low	Yes	Yes	Yes	Yes	Yes
Extra Low	—	Yes	Yes	Yes	—
Air Only	Yes	Yes	Yes	Yes	Yes
Automatic Dry					
Cycles	10	10	10	9	8
Timed Dry	Yes	Yes	Yes	Yes	Yes
Damp Dry	—	Yes	Yes	Yes	Yes
Touch-Up	Yes	Yes	Yes	—	—
Bulky Items	Yes	Yes	Yes	—	—
NSF Certified Sanitization Cycle	—	—	—	—	—
Wrinkle & Odor Removal	—	—	—	—	—
Super Delicate	Yes	Yes	Yes	—	—
Quick Dry	Yes	Yes	Yes	—	—
Normal	Yes	Yes	Yes	Yes	Yes
Casual	Yes	Yes	Yes	Yes	Yes
Jeans	—	Yes	Yes	—	—
Tumble Press®	—	—	—	—	—
Wrinkle Shield™	Off/120	Off/140	Off/140	Off/90	Off/60
Heavy Duty	Yes	Yes	Yes	Yes	Yes
Towels/Cottons	—	Yes	Yes	—	—
Delicates	Yes	Yes	Yes	Yes	Yes
Small Loads	—	—	—	Yes	Yes
Steam Cycles	—	—	—	—	—
Enhanced Touchup	—	—	—	—	—
Quick Refresh	—	—	—	—	—
ECO Normal	Yes	—	—	Yes	Yes
Convenience					
Large Side-Swing Door	Yes	Yes	Yes	Yes	Yes
End-of-Cycle Signal	Variable	Variable	Variable	Variable	Variable
DuraWhite™ Interior	Yes	Yes	Yes	Yes	Yes
Interior Light	Yes	Yes	Yes	Yes	Yes
Dry Rack Coupon	Yes	Yes	Yes	—	—
General Information					
Electric Heating Element (watts)†	5400	5400	5400	5400	5400
Gas Heating Element (BTU)††	20,000	20,000	20,000	20,000	20,000
Venting	4-Way	4-Way	4-Way	4-Way	4-Way
Cabinet Width (in.)	27	27	27	—	—
Approx. Shipping Weight (lbs.) Electric Gas	 149 149	 149 149	 149 149	 136 139	 136 139
Color Availability*	W, R, L	W	E	W, R, L	W

* W – White with Silver Metallic or White with Dove Grey Accents, E – Ocean Sapphire, R – Cranberry, and L – Lunar Siver

† Electric requirements for electric dryer models 240V, 3-Wire, 60 Hz, AC, Standard 30-Amp Fuse Branch Circuit (subject to local codes).

†† Electric requirements for gas dryer models 120V, 3-Wire, 60 Hz, AC, Standard 15-Amp Fuse Branch Circuit (subject to local codes).

NOTE: Before purchasing this appliance, read important information about the estimated annual energy consumption or energy efficiency rating available from your dealer.

TOP LOADING DRYER FEATURES & SPECIFICATIONS

	Cabrio®			
	29"			
Electric Model No.	**WED6600W**	**WED6600V**	**WED6400S**	**WED6200S**
Gas Model No.	**WGD6600W**	**WGD6600V**	**WGD6400S**	**WGD6200S**
Drying System				
Capacity	7.0 cu. ft.	7.0 cu. ft.	7.0 cu. ft.	7.0 cu. ft.
AccelerCare® Drying System	Yes	Yes	Yes	Yes
AccuDry™ Sensor	Yes	Yes	Yes	Yes
Quiet Dry	Ultra	Ultra	Ultra	Plus
Extra-Large Lint Screen	Top-Cabinet	Top-Cabinet	Top-Cabinet	Top-Cabinet
Dryer Controls				
Temperature Settings	5	5	5	5
High	Yes	Yes	Yes	Yes
Medium	Yes	Yes	Yes	Yes
Low	Yes	Yes	Yes	Yes
Extra Low	Yes	Yes	Yes	Yes
Air Only	Yes	Yes	Yes	Yes
Moisture Settings	4	4	4	4
Automatic Dry				
Cycles	7	7	7	7
Timed Dry	Yes	Yes	Yes	Yes
Tumble Press®/Casual/Permanent Press	Yes	Yes	Yes	Yes
Heavy Duty	Yes	Yes	Yes	Yes
Towels/Cottons/Normal	Yes	Yes	Yes	Yes
Quick Dry	—	—	Yes	Yes
Touch-Up	—	—	Yes	Yes
Delicates	Yes	Yes	Yes	Yes
Steam Cycles	2	2	—	—
Enhanced Touch-Up	Yes	Yes	—	—
Quick Refresh	Yes	Yes	—	—
Damp Dry	Option	Option	Option	Option
Wrinkle Shield™	Off/90	Off/90	Off/90	Off/60
Convenience				
Wide-Opening Hamper Door	—	—	—	—
Wide-Opening Large Side-Swing Door	Glass	Glass	Glass	Solid
Side-Swing Door	—	—	—	—
End-of-Cycle Signal	Off/Soft/Loud	Off/Soft/Loud	Off/Soft/Loud	On/Off
DuraWhite™ Interior	Yes	Yes	Yes	Yes
Interior Light	Auto/Manual	Auto/Manual	Auto/Manual	Auto
General Information				
Electric Heating Element (watts)†	5400	5400	2700/5400	5400
Gas Heating Element (BTU)††	20,000	20,000	20,000	20,000
Venting	Rear	Rear	Rear	Rear
Approx. Shipping Packaged Weight (lbs.) Electric Gas	 146 152	 146 152	 144 150	 144 150
Color Availability*	L	W	W, B	W

* Q – White, W – White with Silver Metallic or White with Dove Grey Accents, B – Black with Silver Metallic, H – Red with Silver Metallic , and L – Lunar Silver
† Electric requirements for electric dryer models 240V, 3-Wire, 60 Hz, AC, Standard 30-Amp Fuse Branch Circuit (subject to local codes).
†† Electric requirements for gas dryer models 120V, 3-Wire, 60 Hz, AC, Standard 15-Amp Fuse Branch Circuit (subject to local codes).

NOTE: Before purchasing this appliance, read important information about the estimated annual energy consumption or energy efficiency rating available from your dealer.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

TOP LOADING DRYER FEATURES & SPECIFICATIONS

	Super Capacity Plus		Super Capacity			Extra Large Capacity
	29"		29"			29"
Electric Model No.	**WED5790V**	**WED5700V**	**WED5300V**	**WED5200V**	**WED5100V**	**WED5590V**
Gas Model No.	**WGD5790V**	**WGD5700V**	**WGD5300V**	**WGD5200V**	**WGD5100V**	**WGD5590V**
Drying System						
Capacity	7.0 cu. ft.	7.0 cu. ft.	7.0 cu. ft.	7.0 cu. ft.	6.5 cu. ft.	5.9 cu. ft.
AccuDry™ Sensor	—	Yes	—	—	—	—
Quiet Dry	Yes	Plus	Yes	Yes	Yes	Yes
Extra-Large Lint Screen	Top-Cabinet	Top-Cabinet	Top-Cabinet	Top-Cabinet	Top-Cabinet	Top-Cabinet
Dryer Controls						
Temperature Settings	4	5	5	5	3 (In Timer)	3 (In Timer)
High	Yes	Yes	Yes	Yes	In Timer	In Timer
Medium	Yes	Yes	Yes	Yes	—	—
Low	Yes	Yes	Yes	Yes	In Timer	In Timer
Extra Low	—	Yes	Yes	Yes	—	—
Air Only	In Timer	Yes	Yes	Yes	In Timer	In Timer
Moisture Settings	—	—	—	—	—	—
Automatic Dry						
Cycles	12	14	12	10	8	5
Timed Dry	Yes	Yes	Yes	Yes	Yes	Yes
Tumble Press®/Casual/ Permanent Press	Yes	Yes	Yes	Yes	—	—
Heavy Duty	Yes	Yes	—	—	—	—
Towels/Cottons/Normal	—	Yes	—	—	—	—
Delicates	Yes	Yes	—	—	—	—
Damp Dry	Yes	Yes	Yes	Yes	—	—
Wrinkle Shield™	Off/40	Off/30/90	Off/90	Yes	—	—
Fluff/Air (no heat)	Yes	Yes	Yes	Yes	Yes	Yes
Convenience						
Wide-Opening Hamper Door	Yes	Yes	Yes	Yes	—	—
Wide-Opening Large Side-Swing Door	—	—	—	—	Yes	—
Side-Swing Door	—	—	—	—	—	Yes
End-of-Cycle Signal	On/Off	Variable	Yes	Yes	—	—
DuraWhite™ Interior	Yes	Yes	Yes	Yes	Yes	Yes
Interior Light	Yes	Yes	Yes	Yes	Yes	—
SpillGuard™ Top	Yes	Yes	Yes	Yes	Yes	Yes
General Information						
Electric Heating Element (watts)†	5400	5400	5400	5400	5400	5400
Gas Heating Element (BTU)††	22,000	22,000	22,000	22,000	22,000	22,000
Venting	Rear	Rear	Rear	Rear	Rear	Rear (Long Vent)
Approx. Shipping Packaged Weight (lbs.) Electric Gas	 122 124	 122 124	 122 124	 122 124	 118 122	 118 122
Color Availability*	Q	W, H	W	Q	Q	Q

* Q – White, W – White with Silver Metallic or White with Dove Grey Accents, and H – Red with Silver Metallic

† Electric requirements for electric dryer models 240V, 3-Wire, 60 Hz, AC, Standard 30-Amp Fuse Branch Circuit (subject to local codes).

†† Electric requirements for gas dryer models 120V, 3-Wire, 60 Hz, AC, Standard 15-Amp Fuse Branch Circuit (subject to local codes).

NOTE: Before purchasing this appliance, read important information about the estimated annual energy consumption or energy efficiency rating available from your dealer.

DUET® WASHER & DRYER DIMENSIONS

Duet® Washer Dimensions
(All dimensions in inches)

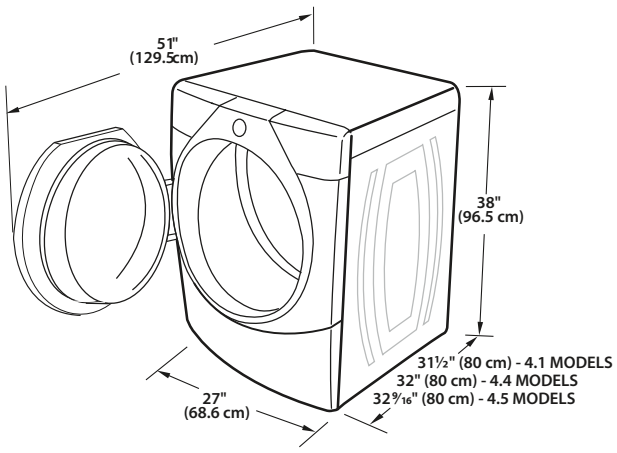

Duet® Dryer Dimensions
(All dimensions in inches)

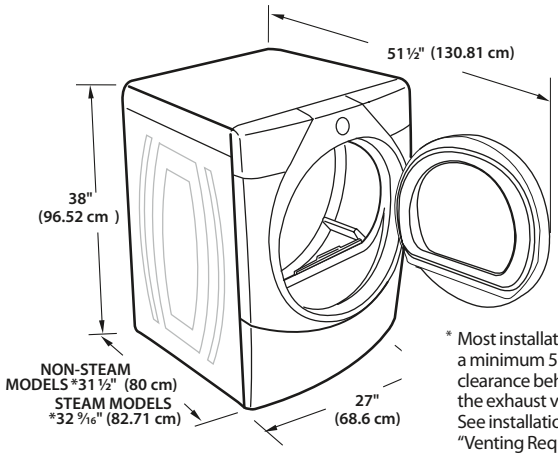

* Most installations require a minimum 5½" (14 cm) clearance behind the dryer for the exhaust vent with elbow. See installations Instructions, "Venting Requirements."

Duet® Fabric Care System Installation Clearances

Closet Installation

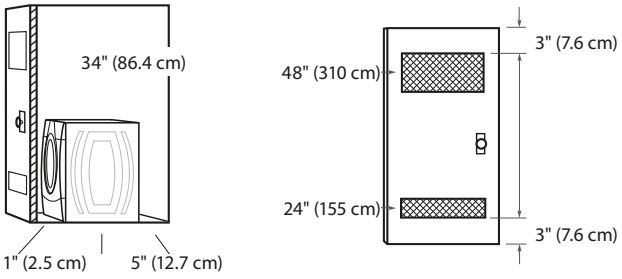

31 ½" (80 cm)
32 9/16" (82.71 cm) – WE/GD9700W

Recessed or Closet Installation with Pedestal

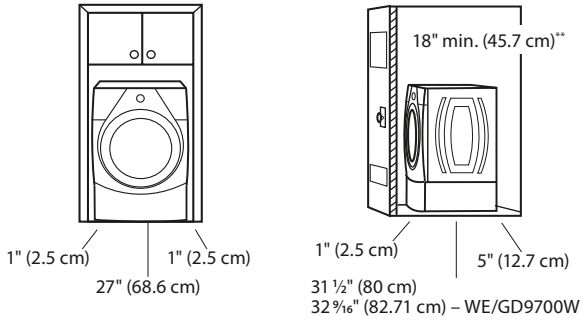

31 ½" (80 cm)
32 9/16" (82.71 cm) – WE/GD9700W

**Min. top and bottom air openings for closet door.

Installation with Stack Kit #8541503

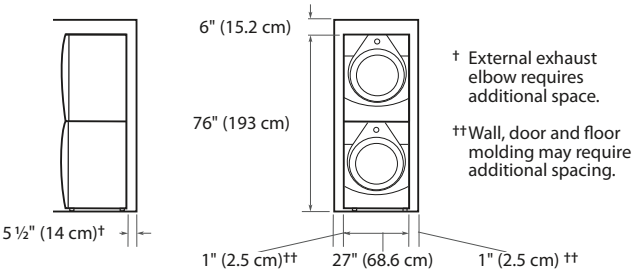

† External exhaust elbow requires additional space.

†† Wall, door and floor molding may require additional spacing.

Custom Under Counter Installation

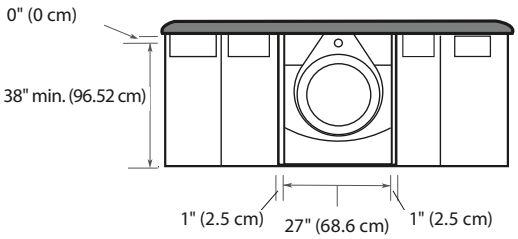

DUET® LAUNDRY PEDESTALS

Optional 15.5" Pedestal—with Storage Drawer
(Model No. XHP1550V)

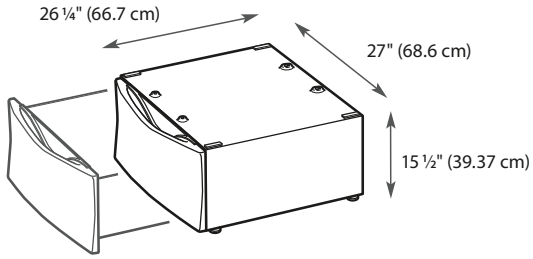

Optional 10" Pedestal
(Model No. WHP1000S)

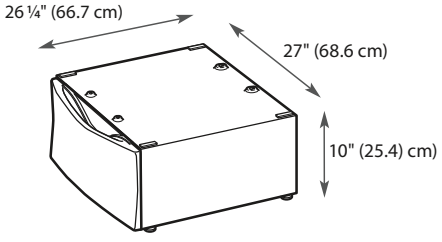

2007 to Present Duet® Dryer Door Reversal Kit
#8579666A

Fits all WFW models (all colors)

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

DUET® WASHER & DRYER DIMENSIONS

Duet® Washer Dimensions
WFW9250W, WFW9150W

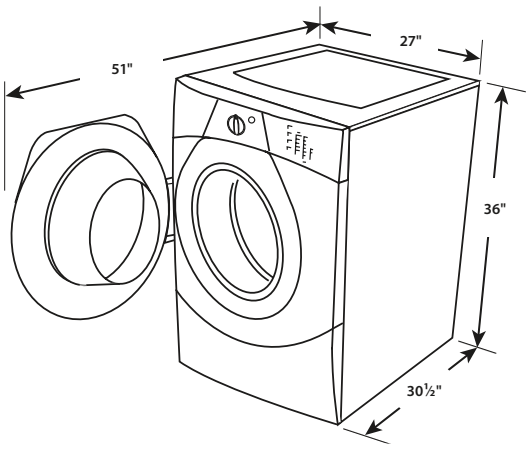

Duet® Dryers Dimensions
WED/GD9250W, WGD/GD9150W

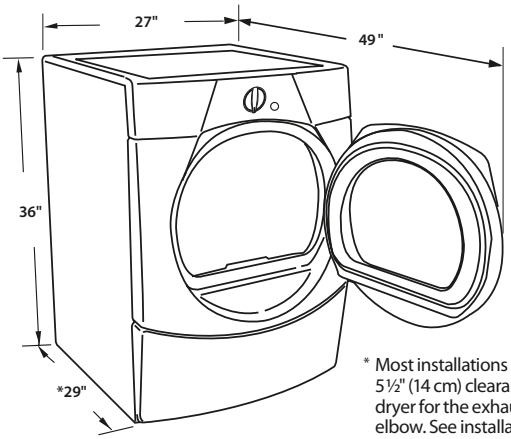

* Most installations require a minimum 5½" (14 cm) clearance behind the dryer for the exhaust vent with elbow. See installations Instructions, "Venting Requirements."

Duet® Fabric Care System Installation Clearances
For closet installation, with a door, the minimum ventilation openings in the top and bottom of the door are required (view 2). Louvered doors with equivalent air ventilation openings in the top and bottom are acceptable.

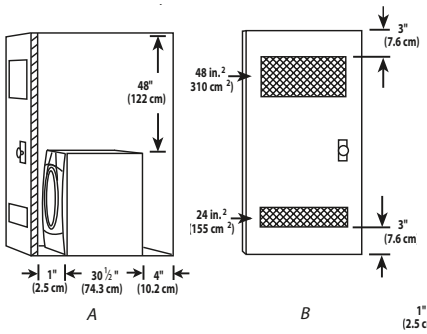

A. Side view - closet or confined area
B. Closet door with vents

Closet or Recessed Installation with Pedestal

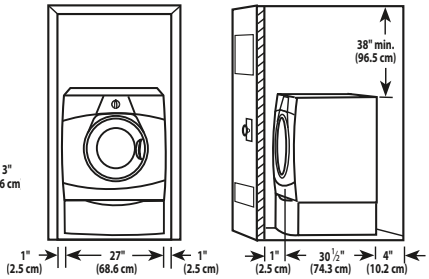

Recommended installation spacing for cabinet installation
For cabinet installation, with a door, the minimum ventilation openings in the top are required.

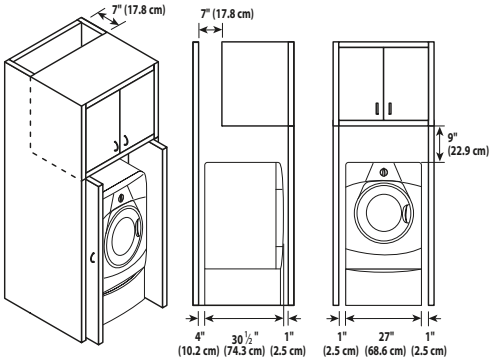

Stacked Washer and Dryer—Installation with Stack Kit #8572546

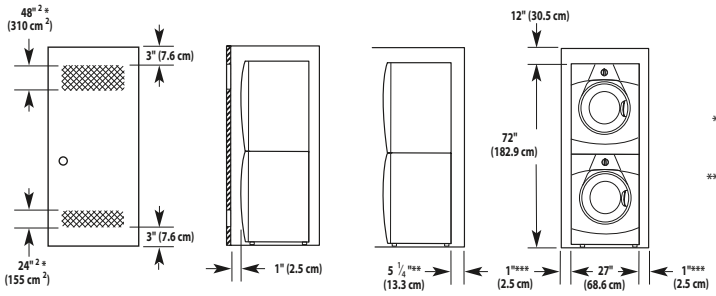

*Min. top and bottom air openings for closet door.
**External exhaust elbow requires additional space.
***Wall, door and floor molding may require additional spacing.

Custom Under Counter Installation
Dimension shown are the recommended spacing

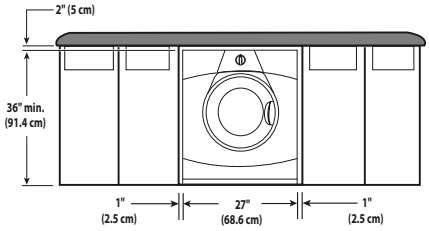

DUET® LAUNDRY PEDESTALS

Optional 15.5" Pedestal with Storage Drawer
(Model No. XHP1550V)

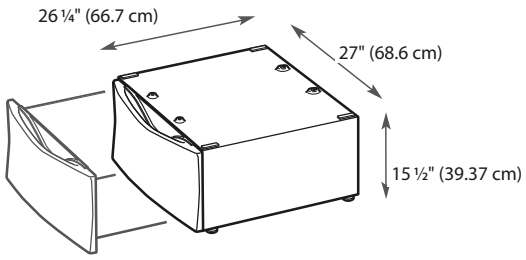

Optional 10" Pedestal
(Model No. WHP1000S)

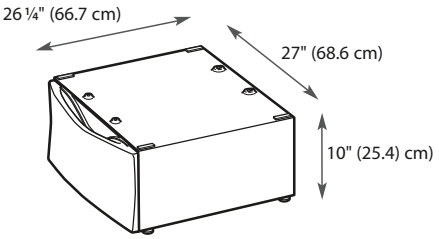

CABRIO® WASHER & DRYER DIMENSIONS

Cabrio® Washer Dimensions
(All dimensions in inches)

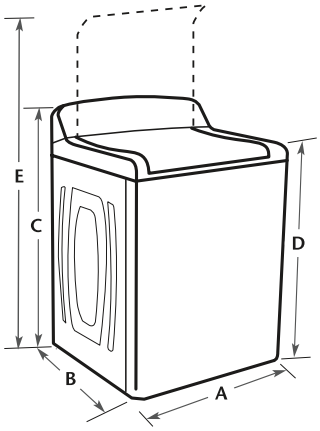

Model Number	Width A	Depth B	Max Height C	Top Height D	Height with Lid Open E
WTW6200V	27 ½	27	42	36	58
WTW6500W	27 ½	27	42	36	58
WTW6800W	27 ½	27	42	36	58

Cabrio® Dryer Dimensions
(All dimensions in inches)

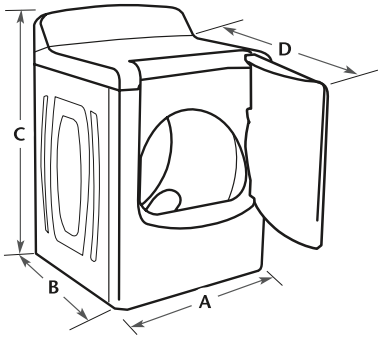

Model Number	Width A	Depth Electric/Gas B	Max Height C	Depth with Door Open D
WE/GD6200S	29	29 ⅛*	42	52 ½*
WE/GD6400S	29	29 ⅛*	42	52 ½*
WE/GD6600V	29	29 ⅛*	42	52 ½*

* Add 5 ½" for proper venting.

Cabrio® Fabric Care System Installation Clearances

Closet Installation

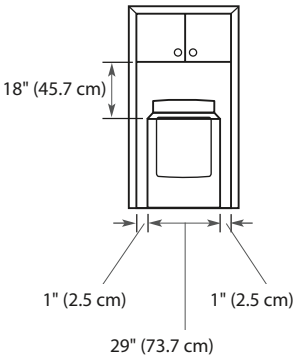

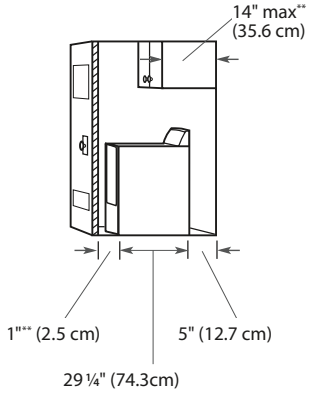



**Required spacing

Dryer Vent Hole Location



Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

24" FRONT-LOAD LAUNDRY PAIR FEATURES & SPECIFICATIONS

Model No.	WFC7500V 1200 RPM
Wash System	
Capacity	2.3 cu. ft.
Control Type	Rotary Electronic Knobs
Wash/Spin Speed Combinations	2 Tumble/ 8 Spin
Built-In Heater	Internal (140° F)
Motor	Variable
Circuit Breaker or Time Delay Fuse	15 or 20 Amp
Volts @ 60 Hz.	120
ENERGY STAR® Qualified	Yes
Washer Controls	
Cycles	8
Normal Cycles	Yes
Heavy Soil (heater)	Yes
Whites	Yes
Normal	Yes
Colors	Yes
Casual/Permanent Press Cycles	Yes
Synthetic Cycles	Yes
Heavy Soil (heater)	Yes
Normal	Yes
Colors	Yes
Delicate Cycles	Yes
Handwash	Yes
Prewash	Yes
Quick Wash	Yes
Extra Rinse	Yes
Spin Only	Yes
Convenience	
Bleach Dispenser	Yes
Detergent Dispenser	Yes
Prewash Detergent Dispenser	Yes
Rinse/Spin	Yes
End-of-Cycle Signal	Yes
Wash/Rinse Temperatures	4
Water Levels	Automatic
General Information	
Wash Basket	Stainless Steel
Approx. Shipping Weight (lbs.)	173
Color Availability*	W

* W – White
®ENERGY STAR is a U.S. Registered Mark.

Model No.	WED7500V
Drying System	
Capacity	3.8 cu. ft.
Control Type	Rotary Electronic Knobs
Motor	Variable
Circuit Breaker or Time Delay Fuse	15 or 20 Amp
Volts @ 60 Hz.	240
Dryer Controls	
Cycles	11
Regular	Yes
More Dry	Yes
Normal Dry	Yes
Less Dry	Yes
Damp Dry	Yes
Synthetic	Yes
More Dry	Yes
Normal Dry	Yes
Less Dry	Yes
Damp Dry	Yes
Timed Dry	Yes
60 Minute	Yes
40 Minute	Yes
20 Minute	Yes
Convenience	
End-of-Cycle Signal	Yes
Moisture Sensor Control	Yes — Sensor Baffles
Drying Temperatures	2—Normal, Low
Stack Kit Included	W10178021A
General Information	
Electric Heating Element (watts)†	2500
Long Vent Exhaust System	Yes/Rear
Approx. Shipping Weight (lbs.)	88
Drum	Stainless Steel
Color Availability*	W

* W – White
† Electric requirements for electric dryer models 240V, 3-Wire, 60 Hz, AC, Standard 30-Amp Fuse Branch Circuit (subject to local codes).

NOTE: Before purchasing this appliance, read important information about the estimated annual energy consumption or energy efficiency rating available from your dealer.

24" FRONT-LOAD LAUNDRY PAIR DIMENSIONS

WASHER & DRYER DIMENSIONS

	Height Overall	Width (Cabinet Only)	Overall Depth (Door Open)	Overall Depth (Door Closed)
WFC7500V	33 ½	23 ½	38	24
WED7500V	33 ¼	23 ⅜	39	23 ¼

All dimensions are shown in inches.

WHIRLPOOL® CLASSIC WASHER & DRYER DIMENSIONS

All Washers

(All dimensions in inches)

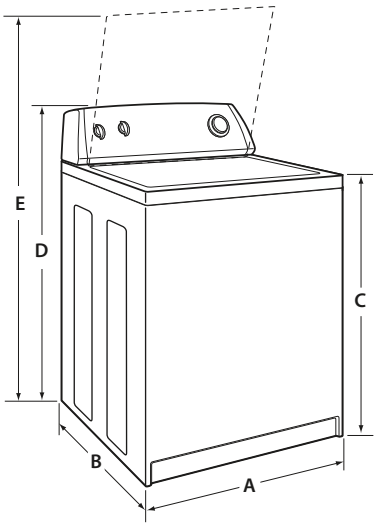

Model Number	Width A	Depth B	Top Height C	Max Height D	Height with Lid Open E
WTW58ES	26 7/8	25 1/2	36	42 1/2	53
WTW57ES	26 7/8	25 1/2	36	42 1/2	53
WTW5790	26 7/8	25 1/2	36	42 1/2	53
WTW5590	26 7/8	25 1/2	36	42 1/2	53
WTW5505	23 7/8	25 1/2	36	42 1/2	53
WTW5300	26 7/8	25 1/2	36	42 1/2	53
WTW5200	26 7/8	25 1/2	36	42 1/2	53
WTW5100	26 7/8	25 1/2	36	42 1/2	53

Dryers with a Wide-Opening Hamper Door

(All dimensions in inches)

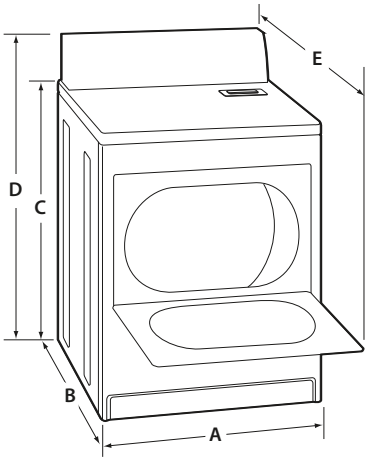

Dryers with a Large Side-Swing Door or a Small Side-Swing Door

(All dimensions in inches)

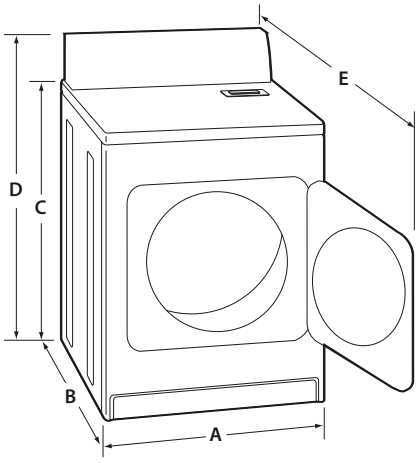

Model Number	Width A	Depth Electric/Gas B		Top Height C	Max Height D	Depth with Door Open E
WE/GD5700	29	27 3/4*	28 1/4*	36	42 1/2	50 9/16
WE/GD5790	29	27 3/4*	28 1/4*	36	42 1/2	50 9/16
WE/GD5590	29	27 3/4*	28 1/4*	36	42 1/2	48 9/16
WE/GD5300	29	27 3/4*	28 1/4*	36	42 1/2	50 9/16
WE/GD5200	29	27 3/4*	28 1/4*	36	42 1/2	50 9/16
WE/GD5100	29	27 3/4*	28 1/4*	36	42 1/2	50 9/16

* Add 5 1/2" for proper venting.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

COMPACT WASHER & DRYER FEATURES & SPECIFICATIONS

COMPACT WASHER

Model No.	22" LCE4332P Portable
Wash System	
Capacity (cu. ft.)	2.1
Wash & Spin Speeds	3 Wash/1 Spin
Gentle Wash System	Yes
Straight-Vane Agitator	Yes
Easy-to-Clean Lint Filter	Yes
Washer Controls	
Automatic Cycles	4
Normal	Yes
Heavy Duty	Yes
QuickWash	Yes
Delicate	Yes
Wash/Rinse Temperatures	3
Water Levels	2
Convenience	
Bleach Dispenser	Yes
Fabric Softener Dispenser	Yes
Lighted Cycle Indicators	Yes
General Information	
Wash Basket	Stainless Steel
Motor (hp)	¼
Approx. Shipping Weight (lbs.)	85
Color Availability*	Q

* Q – White

COMPACT DRYER

Model No.	24" LDR3822P Electric Only	24" LER3622P Electric Only
Drying System		
Capacity (cu. ft.)	3.4	3.4
Gentle Heat System	Yes	Yes
Lint Screen	Internal	Internal
Dryer Controls		
Temperature Settings	2	2
Heavy High (heat)	Yes	Yes
Permanent Press/Heavy High (air)	Yes	—
Timer Cycles	3	3
Automatic Dry	Yes	Yes
Permanent Press/ Regular	Yes	Yes
Timed Drying	Yes	Yes
Fluff Air	Yes	Yes
Convenience		
Side-Swing Door	Yes	Yes
End-of-Cycle Signal	Yes	Yes
DuraWhite™ Interior	Yes	Yes
General Information		
Electric Heating Element (watts)	120V/1400W	240V/3000W
Motor (hp)	¼	¼
Installed Cord (ft.)	6	—
Approx. Shipping Weight (lbs.)	100	100
Color Availability*	Q	Q

* Q – White

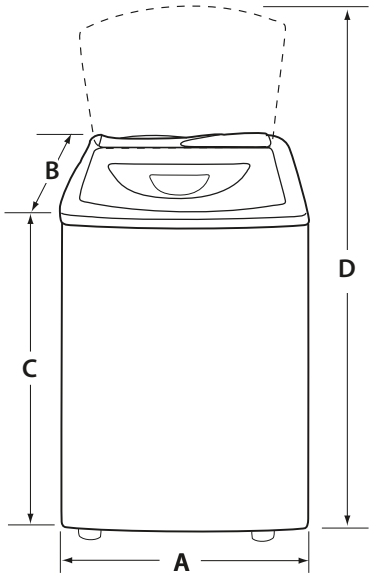

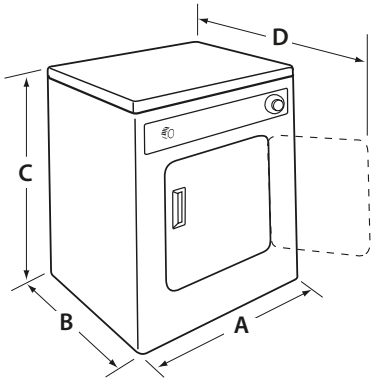

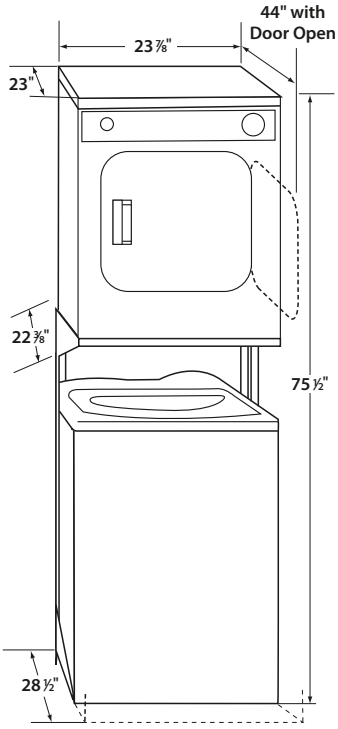

Optional Stack Stand Kit (white) part #49971

COMPACT WASHER DIMENSIONS

Width A	Depth B	Top Height C	Maximum Height with Lid Open D
22⅜	24⅝	38¼	51¼

COMPACT DRYER DIMENSIONS

Width A	Depth B	Top Height C	Depth with Door Open D
23⅞	21 15/16	32	37 3/16

All dimensions are shown in inches.

COMPACT WASHER CASTER KITS

	Part No.
Stationary to Portable	285768
Portable to Stationary	4396746

THIN TWIN® FEATURES & SPECIFICATIONS

THIN TWIN® WASHER

Model No.	27" WET3300S 27" WGT3300S
Wash System	
Capacity (cu. ft.)	2.6
Motor Speed	2
Gentle Wash System	Yes
Agitator	Double Duty
Lint Filter	Yes
Washer Controls	
Automatic Cycles	8
Super Wash	Yes
Regular/Heavy	Yes
Permanent Press	Yes
Delicate	Yes
Soak	Yes
Prewash	Yes
Wash/Rinse Temperatures	4
Water Levels	4
Convenience	
Fabric Softener Dispenser	Pt. #3350834**
Wash Basket	White Porcelain
ToughTop II™ Top & Lid	Yes
General Information	
Direct Drive Motor (hp)	½
Transition Panel	Yes
Self-Leveling Rear Legs	Yes
Tripod 3-Point Suspension	Yes
Polypropylene Tub	Yes
Corrugated Drain Hose	Yes
Rip Cord Suspension	Yes
Front Serviceability	Yes
Color Availability*	Q

* Q – White
** To order replacement parts, please call 1–800–253–1301 or visit www.whirlpool.com

THIN TWIN® DRYER

Model No.	27" WET3300S	27" WGT3300S
Drying System		
Drum Volume (cu. ft.)	5.9	5.9
Dry-Miser™ Control	Automatic	Automatic
Gentle Heat System	Yes	Yes
Lint Screen	Front Mounted	Front Mounted
Dryer Controls		
Temperature Settings	3	3
Automatic Cycles	6	6
Auto Perm. Press/Heavy (high heat)	Yes	Yes
Auto Delicate (low heat)	Yes	Yes
Timed Drying	Yes	Yes
Tumble Press®	Yes	Yes
Damp Dry	Yes	Yes
Fluff Air	Yes	Yes
Push-to-Start Button	Yes	Yes
End-of-Cycle Signal	Yes	Yes
General Information		
4-Way Venting	Yes	Yes
Electrical Requirements	240V/208V	120V
Electric Heating Element (watts)	4600/3460	—
Gas Burner (BTU)	—	16,000
180° Side-Swing Door	Yes	Yes
Baked Acrylic Enamel Cabinet Finish	Yes	Yes
DuraWhite™ Drum Finish	Yes	Yes
Variator Baffles	Yes	Yes
Approx. Shipping Weight (lbs.)	310	340
Color Availability*	Q	Q

* Q – White

THIN TWIN® MODEL DIMENSIONS

Model WET3300S
Model WGT3300S

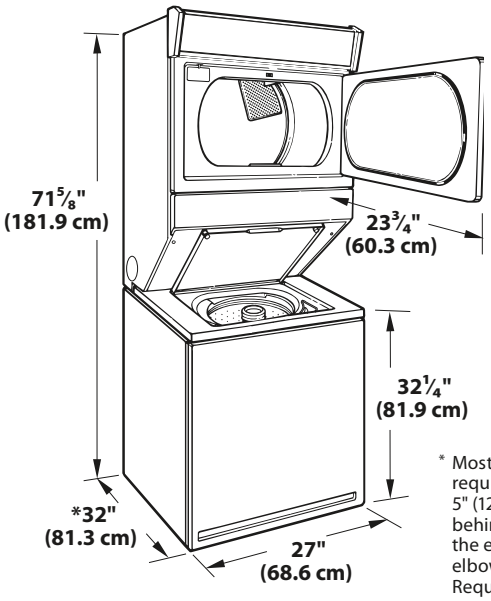

* Most installations require a minimum 5" (12.7 cm) clearance behind the dryer for the exhaust vent with elbow. See "Venting Requirements."

DRYER VENTING REQUIREMENTS

27" THIN TWIN® MODELS

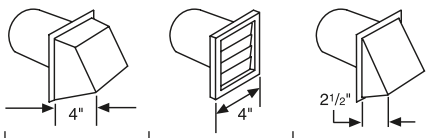

	# of 90° Turns	4" Hood	4" Hood	2½" Hood
Maximum Length of 4" Diameter Rigid Metal Duct	0	37 ft.	37 ft.	35 ft.
	1	32 ft.	32 ft.	27 ft.
	2	24 ft.	24 ft.	19 ft.
Maximum Length of 4" Diameter Flexible Metal Duct	0	25 ft.	25 ft.	20 ft.
	1	21 ft.	21 ft.	16 ft.
	2	15 ft.	15 ft.	10 ft.

EXHAUST INFORMATION



Service Check: The back pressure in any exhaust system used must not exceed 0.6 inches of water column measured with an incline manometer at the point that the exhaust duct connects to the dryer.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

DRYER VENTING REQUIREMENTS

EXHAUST INFORMATION

All dryers require the equivalent of a 4 inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.

27" & 29" DRYER VENTING REQUIREMENTS





# of 90˚ Turns	4" Hood	4" Hood	2½" Hood
Maximum Length of 4" Diameter Rigid Metal Duct			
0	64 ft.	64 ft.	58 ft.
1	54 ft.	54 ft.	48 ft.
2	44 ft.	44 ft.	38 ft.
3	35 ft.	35 ft.	29 ft.
4	27 ft.	27 ft.	21 ft.
Maximum Length of 4" Diameter Flexible Metal Duct			
0	36 ft.	36 ft.	28 ft.
1	31 ft.	31 ft.	23 ft.
2	27 ft.	27 ft.	19 ft.
3	25 ft.	25 ft.	17 ft.
4	23 ft.	23 ft.	15 ft.

LONG-VENT DRYER VENTING REQUIREMENTS

The same length of vent can be used with any of the three exhaust hoods shown.







# of 90˚ Turns	4" Hood	4" Hood	2½" Hood
Maximum Length of 4" Diameter Flexible Metal Duct			
0	120 ft.	120 ft.	120 ft.
1	119 ft.	119 ft.	110 ft.
2	100 ft.	100 ft.	100 ft.
3	90 ft.	90 ft.	90 ft.
4	80 ft.	80 ft.	80 ft.
5	70 ft.	70 ft.	70 ft.

Exhaust vent charts list lengths by type of vent to be used.
Use the chart that matches your vent type.

COMPACT DRYER VENTING REQUIREMENTS







# of 90˚ Turns	4" Hood	4" Hood	2½" Hood
Maximum Length of 4" Diameter Flexible Metal Duct			
0	43 ft.	41 ft.	36 ft.
1	33 ft.	31 ft.	26 ft.
2	23 ft.	21 ft.	16 ft.
3	30 ft.	29 ft.	24 ft.
4	24 ft.	23 ft.	18 ft.
5	16 ft.	15 ft.	10 ft.

DRYER VENTING REQUIREMENTS

EXHAUST INFORMATION

When you use only one type of metal vent...

1. Determine the number of elbows you will need.
2. In the column listing the type of metal vent you are using (rigid or flexible), find the maximum length of metal vent on the same line as the number of elbows.

Maximum Length of 4" Diameter Rigid Metal Duct	
0	120 ft.
1	110 ft.
2	100 ft.
3	90 ft.
4	80 ft.
5	70 ft.

Maximum Length of 4" Flexible Metal Duct	
0	40 ft.
1	37 ft.
2	33 ft.
3	30 ft.
4	27 ft.
5	23 ft.

The maximum length using a 2' x 6' rectangular vent with 2 elbows and transitioning into a 2½' exhaust hood is 8 feet.

When you use a combination of rigid and flexible metal vent...

Example:
You need to use 2 elbows
You will use 5 feet flexible metal vent
The maximum length of rigid metal vent you can use is 85 feet

Length of 4" Diameter Flexible Metal Duct						
# of 90° Turns	0'	1'–5'	6'–10'	11'–15'	16'–20'	21'–25'
Maximum Length of 4" Rigid Metal Duct						
0	120 ft.	105 ft.	90 ft.	75 ft.	60 ft.	45 ft.
1	110 ft.	95 ft.	80 ft.	65 ft.	50 ft.	35 ft.
2	100 ft.	85 ft.	70 ft.	55 ft.	40 ft.	25 ft.
3	90 ft.	75 ft.	60 ft.	45 ft.	30 ft.	15 ft.
4	80 ft.	65 ft.	50 ft.	35 ft.	20 ft.	5 ft.
5	70 ft.	55 ft.	40 ft.	25 ft.	10 ft.	0 ft.

INFORMATION ON STEAM DRYER INSTALLATION

WE/GD9750W, WE/GD9550W, WE/GD9600T, WE/GD9500T, WE/GD6600W & WE/GD6600V CONNECT INLET HOSE

The dryer must be connected to the cold water faucet using the new inlet hoses. Do not use old hoses.

1. Turn cold water faucet off and remove washer inlet hose.
2. Remove old rubber washer from inlet hose and replace with new rubber washer provided. If space permits, attach the brass female end of the "Y" connector to the cold water faucet.

   NOTE: If "Y" connector can be attached directly to cold water faucet, go to Step 6. If "Y" connector cannot be attached directly to the cold water faucet, the short hose must be used. Continue with Step 3.
3. Attach short hose to cold water faucet. Screw on coupling by hand until it is seated on faucet.
4. Using pliers, tighten the couplings with an additional two-thirds turn.

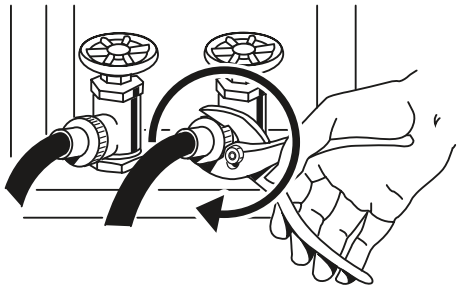

NOTE: Do not overtighten. Damage to the coupling can result.

5. Attach "Y" connector to brass male end of small hose. Screw on coupling by hand until it is seated on connector.
6. Attach straight end of long hose to "Y" connector.
7. Attach washer cold inlet hose to other end of "Y" connector. Screw on coupling by hand until it is seated on connector.
8. Using pliers, tighten the couplings with an additional two-thirds turn.

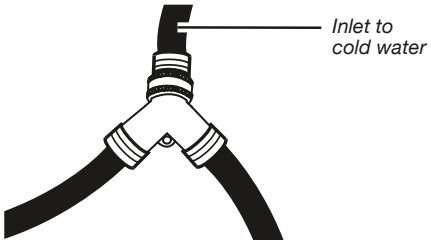

NOTE: Do not overtighten. Damage to the coupling can result.

9. Attach angled end of long hose to fill valve at bottom of dryer back panel. Screw on coupling by hand until it is seated on fill valve connector.
10. Using pliers, tighten the coupling with an additional two-thirds turn.

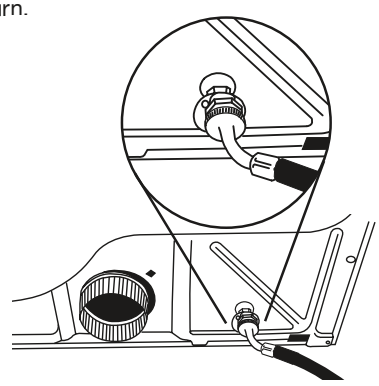

NOTE: Do not overtighten. Damage to the coupling can result.

11. Check that the water faucets are on.
12. Check for leaks around "Y" connector, faucet and hoses.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

DRYER VENTING REQUIREMENTS

DURASAFE™ INSTALLERS VENT KIT



Part No. 4396013RB
- Provides 4 ½" clearance between dryer and wall
- Snap-lock fittings
- Total kit length: 8 feet
- Additional vent can be snapped between sections for longer runs

Kit Contains:
- 2–4' vent sections with attached close elbow + wall offset
- 1–Extension collar - wall
- 2–4" clamps

LP Gas Conversion Kits	Part No.
24" Thin Twin® Dryer and Compacts (10,500 BTU)	49573
27" Thin Twin® Dryer (16,000 BTU)	3392235
Full-Size Gas Dryers (22,000 BTU)	49572
Front-Load Dryer (20,000 BTU)	8576846A
Optional Dryer Rack	
Extra Large Capacity (Large Side-Swing Only Door)	689790
Super Capacity 6.5 cu. ft. (Side-Swing or Hamper Door)	3404351
Super Capacity 7.0 cu. ft	3406839
Duet® and Duet Sport® (Replaces 8521957A and 8563738A)	W10121663
29" (Oval Door Opening Models)	280115
Cabrio®	W10071550A
Ultra-Capacity (Hamper Door Only)	8212450A
4-Way Venting Kit	
White	279818
Biscuit	279925
Pewter	279969
Black	279820
Ocean Blue	280102
Diamond Dust	280171A
Aspen	W10152954
Tuscan Chestnut	W10152955

Optional Accessories

Vent Brushes	
8212614	Top Load Dryer Vent Lint Brush
4210463RW	Front Load Dryer Vent Lint Brush

FABRIC FRESHENER FEATURES & SPECIFICATIONS

Model No.	LRF4001RY
Heavy Duty Cycle	
Heavy Cotton/Cotton Blends	Yes
Normal Cycle	
Wool	Yes
Sweaters	Yes
Easy Care Garments	Yes
Delicate Cycle	
Silk	Yes
Rayon	Yes
Polyester	Yes
General Information	
Electrical	Standard — 2 Prong
Volts @ 60 Hz.	120
Power Cord Length (ft.)	8
Installed Weight (lbs.)	27
Color Availability	Vapor Blue

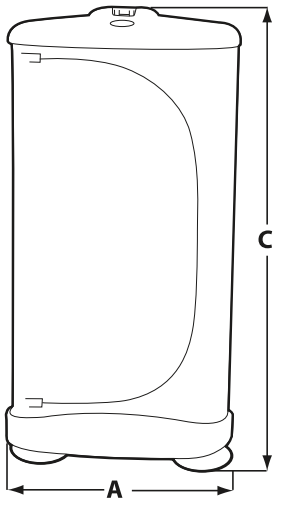

FABRIC FRESHENER DIMENSIONS

	Width A	Depth B	Height C
Open	32 ½	12	57 ⅛
Closed	32 ½	12	10

All dimensions are shown in inches.



VENTING CONFIGURATION

DETERMINE THE BEST FIT FOR YOUR NEEDS

A

PTN : 4396009RP

5' Snap-Lock™ metal, crush-resistant, flexible dryer venting

One end with Snap-Lock™ male fitting and the other with slit-cuff to use as either male or female for standard 4" openings. Includes (2) clamps.

A

PTN : 4396010RP

6' Snap-Lock™ metal, crush-resistant, flexible dryer venting

One end with Snap-Lock™ male fitting and other end with Snap-Lock™ female fitting for standard 4" openings. (Best choice for fast installation with collar(s) and for creating longer runs with other vent pipes.)

A

PTN : 4396033RP / 4396727RP

5' and 8' Metal, crush-resistant, flexible dryer venting

Both ends with slit-cuff touse as either male or female for 4" openings. Includes (2) clamps.

B



PTN : 4396007RW

Through-the-wall vent hood

4" Opening, heavy-duty rigid metal & 10½" pipe with back draft flapper.

B

PTN : 8212662

Flush mounting, louvered vent hood

4" Opening, heavy-duty rigid metal & 10½" pipe with back draft flapper.

C

PTN : 4396008RP

(2) 4" Steel clamps

With phillips/hex head screw. Includes (2) clamps.

FITS ALMOST ANYWHERE



Periscope openings can be on the same or opposite side.

Once attached, periscopes can rotate to any position.



TIGHT CLEARANCE – 2½" OR MORE

Corner outlet beside dryer with short periscope

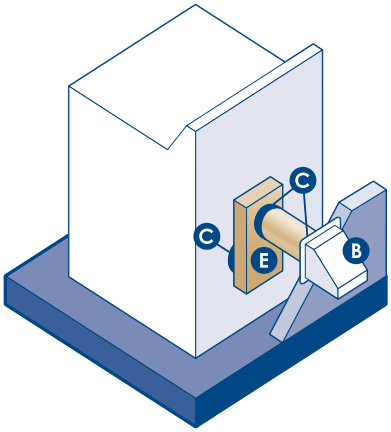

Wall outlet beside dryer with medium periscope

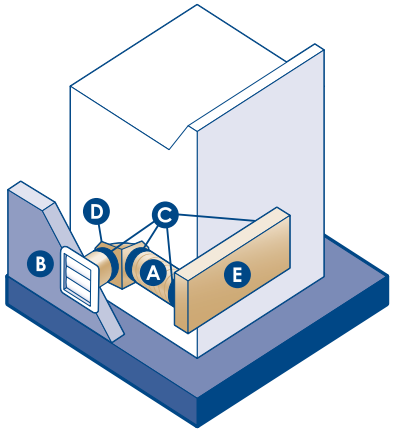

ONE TOUGH KIT

DURASAFE™ VENT INSTALLER'S KIT

PTN: 4396013RB

Everything you need for easy installation

- Pre-attached elbow/ wall-offset saves time
- Standard clearance 4½"
- (1) 4' pipe section attached to a close elbow
- (1) 4' pipe section attached to a wall-offset elbow
- (1) Extension collar
- (2) Clamps for wall and dryer connection

STANDARD CLEARANCE – 4½" OR MORE

Corner outlet beside dryer

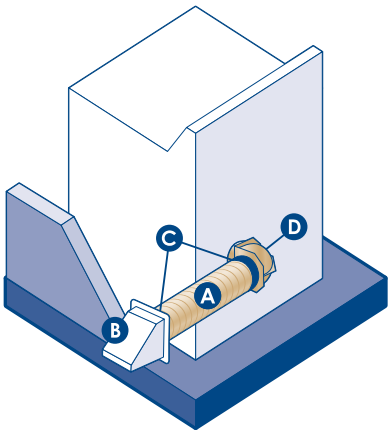

Wall outlet beside dryer

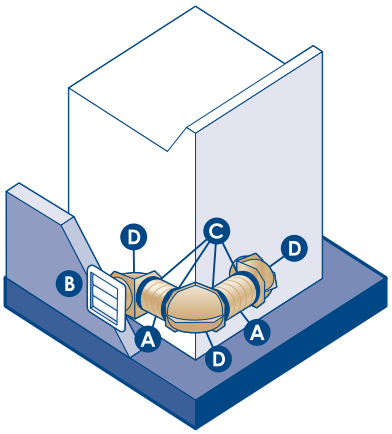

SNAP-LOCK is a trademark of Builders Best.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

VENTING CONFIGURATION

DETERMINE THE BEST FIT FOR YOUR NEEDS

D

PTN : 4396006RW

Close elbow

For standard 4½" clearance. (Best choice for 90˚ turns.)

E

PTN : 8171587RP

0–5" Metal vent periscope

For tight 2½" clearance. One male Snap-Lock™ fitting & one extra-long draw-band collar. Excess length can be trimmed to fit. Includes (2) clamps.

E

PTN : 4396037RP

0–18" Metal vent periscope

For tight 2½" clearance. One male Snap-Lock™ fitting & one extra-long draw-band collar. Excess length can be trimmed to fit. Includes (2) clamps.

E

PTN : 4396011RP

18–29" Metal vent periscope

For tight 2½" clearance. One male Snap-Lock™ fitting & one extra-long draw-band collar. Beveled ends eliminate interference with floors & side walls. Includes (2) clamps.

E

PTN : 4396014

29–50" Metal vent periscope

For tight 2½" clearance. One male Snap-Lock™ fitting & one extra-long draw-band collar. Beveled ends eliminate interference with floors & side walls. Includes (2) clamps.

E

PTN : 4392892

In-wall metal vent periscope extends 29–77" between wall studs

One male Snap-Lock™ fitting & one extra-long draw-band collar. Beveled ends eliminate interference with floors & side walls. Includes (2) clamps.

TIGHT CLEARANCE – 2½" OR MORE – Continued

Ceiling outlet behind dryer with long periscope

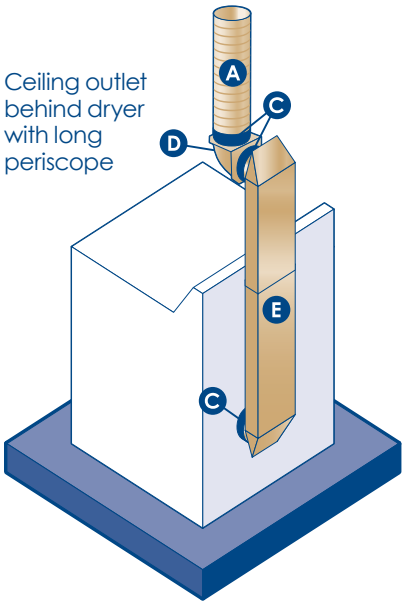

Wall outlet beside dryer with in-wall periscope

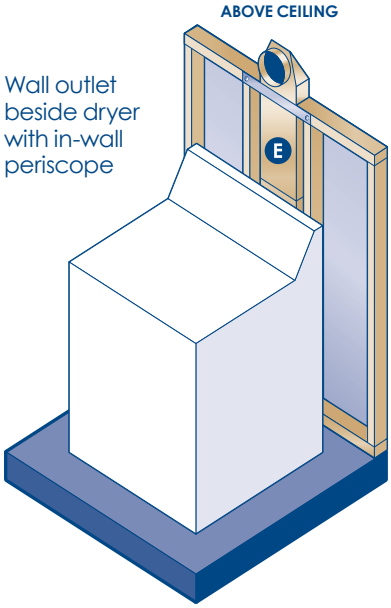

Front-load dryers require more space behind the dryer. The periscope is a perfect attachment since it requires less space than most venting configurations.

STANDARD CLEARANCE – 4½" OR MORE – Continued

Wall outlet behind dryer

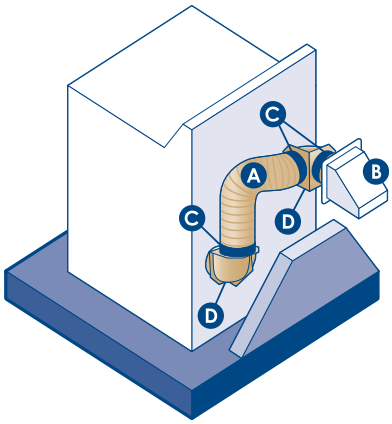

Wall outlet behind dryer

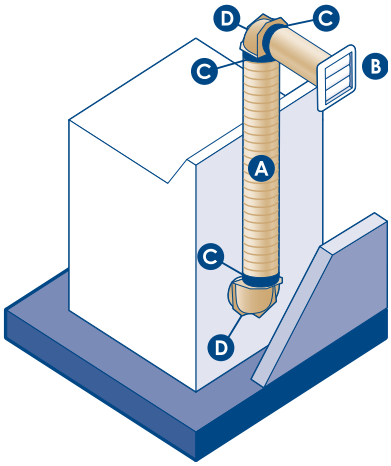

DEEP CLEARANCE – 6"+

Ceiling outlet behind dryer